

# VT4015-12

Use with Ventex AC Adapter\*\*

## FEATURES

- UL/cUL listed to UL 2161
- Small size/lightweight
- Low-voltage input
- Use standard gas pressure
- 12 Volt DC Input connector




## SPECIFICATIONS

Input Voltage	11 to 14VDC
Input Current	1,400mA rms at full load
Output Voltage	4,000 Volts
Output Current	15mA
Operating Temp	32°F to 104°F / 0°C to 40°C
Driving Distance* (Based on Standard 12mm tube. Deduct one foot from driving footages for additional pair of electrodes.)	
Neon	0.5-12 ft (0.15-3.6 m)
Mercury	0.5-10 ft (0.15-3.0 m)

\*See Ventex Luminous Tube Footage Chart for more information.

## DIMENSIONS

Length (A)	3.80 in	9.7 cm
Width (B)	1.85 in	4.6 cm
Height (C)	1.30 in	3.3 cm
Mounting (D)	3.50 in	8.9 cm
Mounting (E)	0.90 in	2.3 cm
Weight	9.0 oz	255 g
Primary Leads	8.0 in	20.3 cm
GTO Leads	18.0 in	45.7 cm

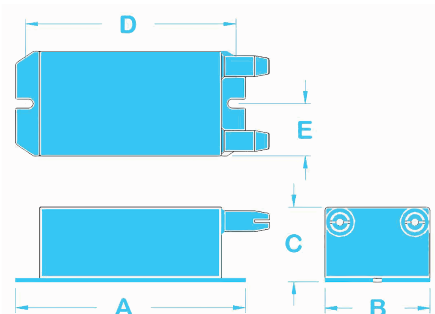

Male connector to mate with wall adapter power supply.

\*\*NOTE: Use with Ventex AC Adapter, found on Page 29 of this catalog.