

# VT4015-12F

Use with Ventex AC Adapter\*\*

## FEATURES

- UL and cUL listed to UL 2161
- Small size and lightweight
- Low-voltage input
- Use standard gas pressure
- Indoor or outdoor operation




## SPECIFICATIONS

|   |                             |
|---|-----------------------------|
| Input Voltage   | 11 to 14VDC                 |
| Input Current   | 1,400mA rms at full load    |
| Output Voltage  | 0V-4,000V                   |
| Output Current  | 15mA                        |
| Operating Temp  | 32°F to 104°F / 0°C to 40°C |
| Driving Distance* (Based on Standard 12mm tube. Deduct one foot from driving footages for additional pair of electrodes.) |                             |
| Neon  | 0.5-12 ft (0.15-3.6 m)      |
| Mercury   | 0.5-10 ft (0.15-3.0 m)      |

\*See Ventex Luminous Tube Footage Chart for more information.

## DIMENSIONS

|               |         |         |
|---------------|---------|---------|
| Length (A)    | 3.80 in | 9.7 cm  |
| Width (B)     | 1.85 in | 4.6 cm  |
| Height (C)    | 1.30 in | 3.3 cm  |
| Mounting (D)  | 3.50 in | 8.9 cm  |
| Mounting (E)  | 0.90 in | 2.3 cm  |
| Weight        | 9.0 oz  | 255 g   |
| Primary Leads | 8.0 in  | 20.3 cm |
| GTO Leads     | 18.0 in | 45.7 cm |

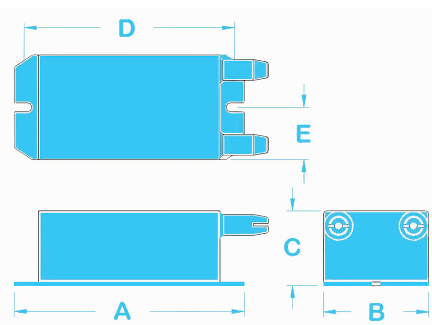

Male connector to mate with wall adapter power supply.  
\*\*Ventex AC Adapter is found on Page 29 of this catalog.