

VT4030-120

FEATURES

- Ten-foot power cord (3 Pin)
- Line load regulated (30mA self-adjusting output regardless of load size or input voltage fluctuations)
- High power factor (energy saving/cost effective)
- Use with mercury or neon
- Solid state technology
- 24" H-V Output Leads
- UL 2161 listed
- Ground connection via mounting foot and 3-prong plug
- Open circuit and overload will shut unit down




SPECIFICATIONS

Input Voltage	120VAC (+/-10%) 50/60 Hz
Input Current	0.3A rms
Power Factor	0.92 min.
Output Frequency	Variable
Output Voltage	0V-4,000V
Output Current	30mA
Operating Temperature	32°F to 104°F/ 0°C to 40° C
Driving Distance* (Based on Standard 12mm tube. Deduct one foot from driving footages for each pair of electrodes.)	
Neon	1-10 ft (0.03-3.0 m)
Mercury	1-12 ft (0.03-3.7 m)

*See *Ventex Luminous Tube Footage Chart* for more information.

DIMENSIONS

Length (A)	5.1 in	13.0 cm
Width (B)	1.8 in	4.6 cm
Height (C)	1.40 in	3.6 cm
Mounting (D)	4.50 in	11.4 cm
Mounting (E)	1.20 in	3.0 cm
Weight	20.0 oz	567 g
Power Cord	10.0 ft	3.0 m
GTO Leads	24.0 in	61.0 cm

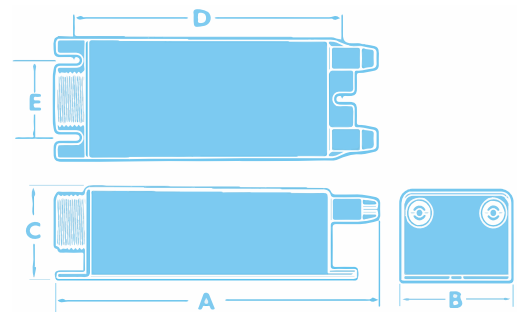

Exclusive: These units are protected by Ventex's patented protective circuitry to prevent false tripping due to capacitive current. Patent #5892646