

VT5520A-120F

Dims or flashes with VT-DF01 Dimmer & Flasher

FEATURES

- Flashing/Animation remotely controlled via 9 to 15VDC signal
- Automatic overload shutdown
- Open Circuit Protection
- Grounding lead
- 24" input wires
- Utilizes standard gas pressure
- Solid state technology
- 18-inch H-V output leads
- Complies with UL and CSA




SPECIFICATIONS

Input Voltage	120VAC (+/-10%) 50/60 Hz
Input Current	0.35 A max.
Power Factor	N/A
Output Frequency	Variable
Output Voltage	100V-5,500V
Output Current	24mA
Operating Temperature	-30°F to 122°F / -34°C to 50°C
Driving Distance* (Based on Standard 12mm tube. Deduct one foot from driving footages for each pair of electrodes.)	
Neon	1-13 ft (0.3-3.9 m)
Mercury	1-16 ft (0.3-4.9 m)

*See Ventex Luminous Tube Footage Chart for more information.

DIMENSIONS

Length (A)	4.9 in	12.45 cm
Width (B)	1.5 in	3.81 cm
Height (C)	0.90 in	2.29 cm
Mounting (D)	4.50 in	11.43 cm
Mounting (E)	0.75 in	1.91 cm
Weight	7.0 oz	198 g
Primary Leads	18.0 in	45.7 cm
GTO Leads	18.0 in	45.7 cm

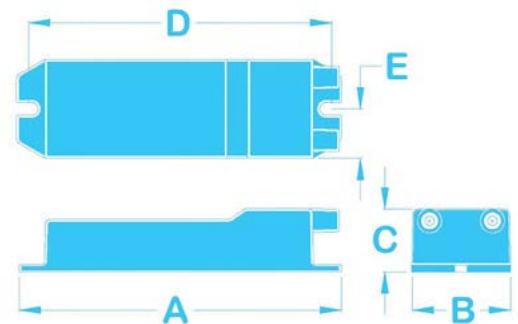

Exclusive: These units are protected by Ventex's patented protective circuitry to prevent false tripping due to capacitive current. Patent #5892646



Scan this QR code to see this power supply in action!