

VT9030-120

FEATURES

- Pull-chain on/off switch
- Ten-foot power cord (3 Pin)
- Unit will not trip on capacitive currents up to 15mA
- Line load regulated (30mA self-adjusting output regardless of load size or input voltage fluctuations)
- Sign grounding connection via mounting foot
- UL 2161 listed
- Complies with CSA22.2, No. 107.1, No. 13
- High power factor
- Open circuit overload and ground fault protection




SPECIFICATIONS

Input Voltage	120VAC (+/-10%) 50/60 Hz	
Input Current	0.9A rms	
Power Factor	0.95 min.	
Output Frequency	Variable	
Output Voltage	0V-9,000V	
Output Current	30mA	
Operating Temp	32°F to 104°F/ 0°C to 40°C	
Driving Distance** (Based on Standard 12mm tube. Deduct one foot from driving footages for additional pair of electrodes.)		
Neon	4-26 ft (1.2-7.9 m)	
Mercury	4-31 ft (1.2-9.5 m)	

**See Ventex Luminous Tube Footage Chart for more information.

DIMENSIONS

Length (A)	6.50 in	16.5 cm
Width (B)	3.13 in	7.9 cm
Height (C)	1.56 in	3.9 cm
Mounting (D)	6.0 in	15.2 cm
Mounting (E)	2.25 in	5.7 cm
Weight	29.0 oz	793.8 g
Power Cord	10.0 ft	3.0 m
GTO Leads	32.0 in	81.3 cm

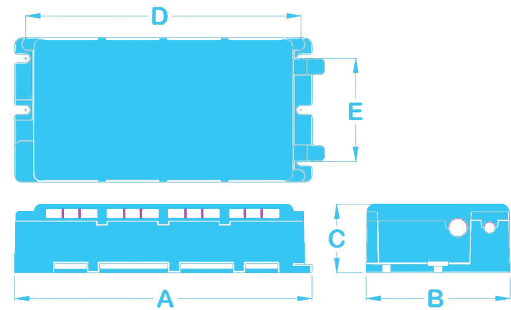

Exclusive: These units are protected by Ventex's patented protective circuitry to prevent false tripping due to capacitive current. Patent #5892646