

TOGGLE SWITCH & ACCESSORIES

UL package 20A toggle switch with molded silicone rubber boot

Specifications

SKU.....	84605.....	Toggle switch silicone boot (Black)*
	84610.....	Toggle switch silicone boot (Gray)*
	84613.....	Toggle switch, large On/Off safety locking plate†
	84660.....	Toggle switch with boot (20A 120-277VAC), gray silicone boot‡
	84675.....	Toggle switch with boot (20A 120-277VAC), black silicone boot‡

Dimensions L x W x H..... 1.25" x 0.625" x 1.062"

Unit of measure..... Bag of 25

* UL/cUL Recognized E129809.


† UL/cUL Recognized E231907/E231907.

‡ Toggle switch reduces accidental shut-offs and is keyed to switch barrel to prevent rotation.

Nearly 10" of lead wire

UL/cUL Recognized for dry, damp, and wet locations when used with our included silicone boot

The only switch rated for 20 Amps up to 277 Volts

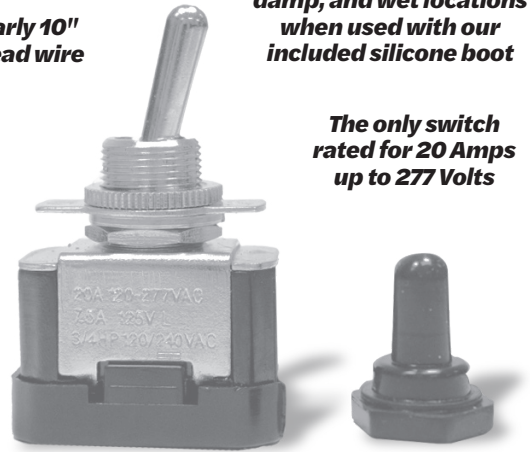


Hand-soldered wire connection (not crimped) for best mechanical and electronic connection

Extremely sturdy hardware, body and boot

Turn toggle switch ON or OFF as you require

Corrosion-resistant plated steel

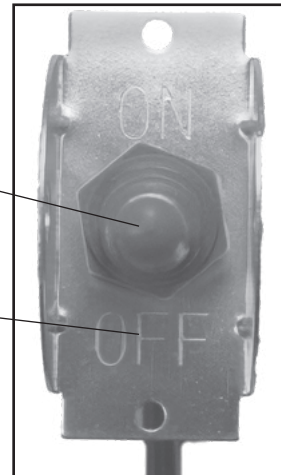

Pre-assembled with On/Off switch plate

Scan Here

to see a video on how to install the locking plate.



ventex tech.com

803.794.8061

3490 Venture Dr., San Angelo, TX 76905

© 2024 Ventex Technology Rev A 2024-11-19

Specifications subject to change without notice.

