

THE WALL PUNCHER

The revolutionary two-part through wall wiring protection device for use in Plenum applications.

Specifications

SKU VT-PUN-COMBO-CASE


Description 15" pipe, through-wall protection for CL2 driven, low-voltage cables (fig. 1), friction-fit silicone grommet (fig. 2 & 3)**

Dimensions 0.5" OD x 0.375" ID x 15" L



Packaging 328 pipes, 328 grommets

Environment Suitable for wet locations, sunlight & UV resistant (F1)

Safety Fire and flame retardant, V-0

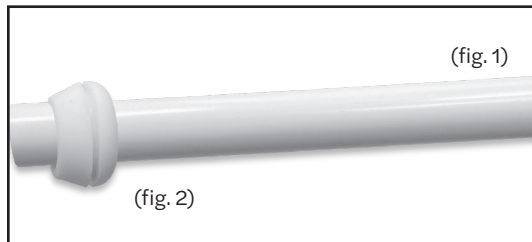

* 0.75" - 0.875" hole required for grommet installation.
 † Material thickness from 0.040" - 0.12" (1 - 3 mm).

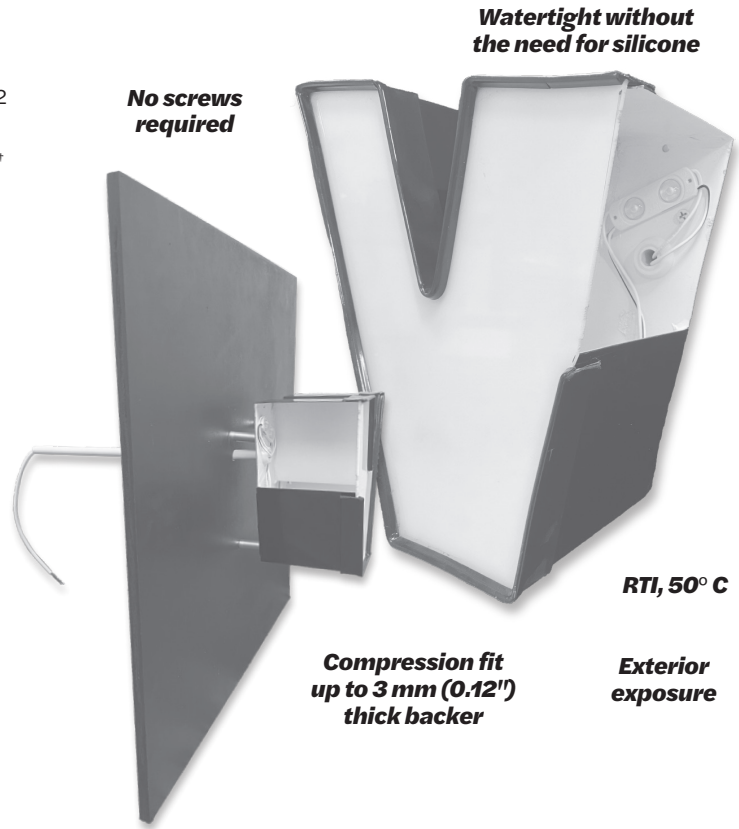

Demo Video

To see a demo installation, please scan the QR code below.

ventex tech.com
 803.794.8061
 3490 Venture Dr., San Angelo, TX 76905

